



MANUFACTURER

Atlanta Barnwood 560 Webb Industrial Drive, Marietta, GA 30062
Phone: (678) 404-1838

MATERIALS

Product Name: American Classic Hardwood Paneling
Species/Description: Domestic hardwoods, including Beech, Elm, Poplar, Hickory, Ash, Maple, Cherry, and other species with original patina
Source: Agricultural/Industrial deconstruction
Color: Sorted by color. Tones may range from tan to brown, and from dark to silver gray. Unlimited color variation is inherent to the product.
Grade: Rustic
Dimensions: Solid
TH—Standard 3/8" — Custom 1/2", 5/8", 3/4"
WD—Standard 3" - 4" - 5" — Custom 6", 7"
LG—Standard 1' to 4' random — Custom 4' to 10' random
Milling: Straight line ripped on 2 edges (R2E)
Finish: Unfinished unless specified otherwise
Hardness: 540–1820
(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

ADDITIONAL INFORMATION


Heartwood: No restriction
Grain: No restriction
Knots: No limitations on sound knots, surface defects from chipped or open knots may be present.
Texture: This product shows a varied pattern of saw marks, wear patterns, colors and textures. Overwood of up to 1/4" can be expected.
Voids: Fastener holes and open knots can be present and may reach 2" in diameter. Larger voids are occasionally included to preserve long lengths. Surface defects from insect marks, including pin holes may be present.
Discoloration: Ferrous staining from previous fasteners may be present.
Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.
Moisture Content: Kiln dried 6–9% prior to milling.

LEED INFORMATION

MRc3: Materials Reuse (materials used for this credit cannot be applied to MRc4 or MRc5)
MRc4: Recycled Content, 100% Post-Consumer Recycled Content (materials used for this credit cannot be applied to MRc3)
MRc5: Regional Materials (call for details)

RECOMMENDED OVERAGE

Recommend 7–12% additional material for on-site grading, trimming and installation factors.

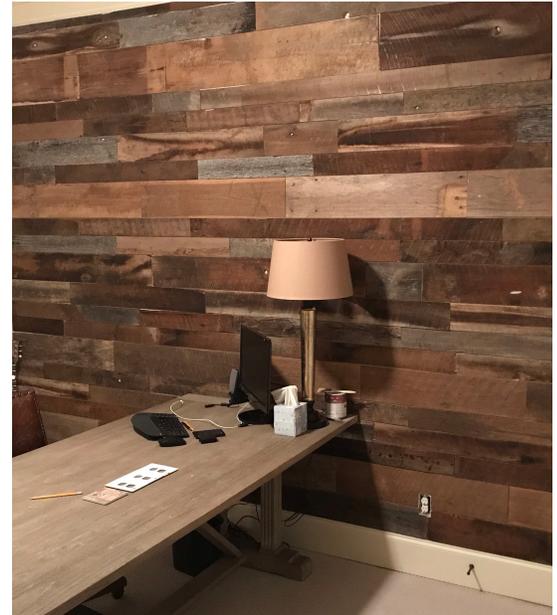

Information is deemed reliable but subject to change. All photos for representation only. Additional information available at our website or call our wood design experts.